



SeaWAVE

ADCP

SeaWAVE

300 kHz / 600 kHz / 1200 kHz


The Rowe Technologies **SeaWAVE** product family of Acoustic Doppler Current Profilers (ADCPs) represent the industry's state of the art in acoustic Doppler technology. The **SeaWAVE** ADCP measures wave direction and wave height while also providing full current profile data – even throughout the wave burst interval.

The **SeaWAVE** simultaneously measures wave spectra, wave direction, and complete current profiles for every ping. The **SeaWAVE** can also measure current profiles during the wave burst interval, so you can get full velocity profile coverage during your deployment.

The **SeaWAVE** uses both a vertical beam and a pressure sensor to accurately measure range to the surface. The vertical beam functions similar to an inverted echo sounder providing more accurate, higher frequency wave measurements.

The **SeaWAVE** wave measurement ADCPs are available in both the direct-read and self-contained configuration.

WaveForce™ Technologies [www.waveforcetechnologies.com], partnered with Rowe Technologies, Inc., offers ocean wave data analysis software packages -- both a real-time and post-processing software suite that interfaces seamlessly with the **SeaWAVE** ADCP outputs.

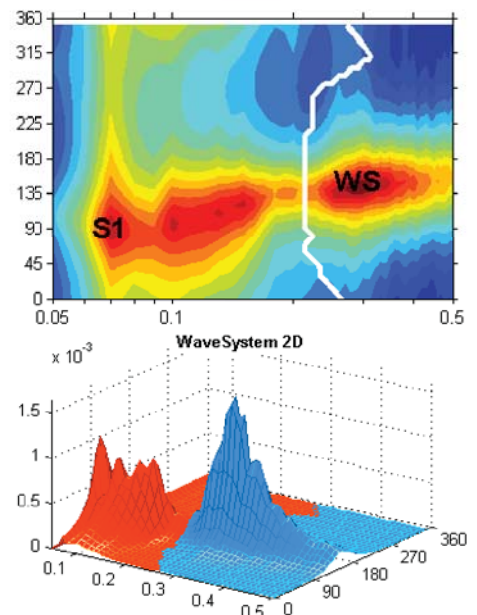



Rowe Technologies, Inc.
 www.rowetechinc.com
 sales@rowetechinc.com
 Tel: +1 858 842 3020

Product Features:

- Large Aperture Vertical Beam – The SeaWAVE Uses a Full-Size Transducer for its Fifth Vertical Beam, -- Thus Providing a Narrower Radiation Pattern for More Accurate Measurements of:
 - o Surface Range.
 - o Vertical Water Profile.
- Data Storage – SeaWAVE Accommodates up to 32GB of Internal Memory. Storing Raw Current Profile Data for Post Processing.
- Data Interfaces – In Addition to the Common Serial Interfaces that **SeaWAVE** Supports (RS232,RS485, RS422), It Also Supports a Separate Ethernet Interface which Allows a High Speed Data Download.
- Configuration to Support Both Direct-Reading and Self-Contained.
- Applications in the Same Package. In Addition to the Common Serial Interfaces that **SeaWAVE** Supports. (RS232,RS485, RS422), It Also Supports a Separate Ethernet Interface Which Allows a High Speed Data Download.
- **WaveForce™** Technologies Offers Both a Real-Time SW Package -- [AutoWaves] and Two Post Processing SW Packages -- [Wavevector, and XWaves].



Optional Product Features:

- Self-Contained DF ADCPs Offer an External Battery Pressure Housing.



SeaWAVE Specifications

Single Frequency (nominal):	600kHz	600kHz	1200kHz
Piston Ceramic Size:	3 in	2 in	2 in
Beam widths [2 way]:	2.00°	2.00°	1.01°
Beam Spacing:	4 beams In Janus (configuration inclined 20° and 5th beam is vertical)		
Velocity Range:	+/- 20 m/s Max; +/- 5 m/s Typical		
Resolution:	0.01 cm/s		
Number of Cells:	up to 200		
Cell Size:	2.0 cm minimum		
Current Profiling:			
Maximum Range:			
Broad Band:	50 m	45 m	20 m
Long-Term Accuracy (High Accuracy Option):	± 0.25%, ± 2mm/s		
Long-Term Accuracy (Low Accuracy Option):			
BB Single-Ping Precision:	3.5 cm/s @ 2 m cell depth		3.5 cm/s @ 1 m cell depth
Data Output Rate:			
Sensors:			
Compass: Range/Accuracy/Resolution:	0-360° / 1°RMS / 0.01°		
Pitch/Roll: Range/Accuracy/Resolution:	Roll +/- 180° / Pitch +/- 90° / <1°RMS /0.01°		
Water Temp: Range/Accuracy/Resolution:	-5° - 70° C / +/- 0.15°C		
Pressure: Range/Accuracy:	Selectable / +/- 10% Range		
Materials Options:	Acetal		
Input Power:			
Voltage Range (Ext DC Input):			
Average Power (5% duty cycle) / Peak Current:	30 W typical	30 W typical	23 W typical
Output Data:			
Communications:	RS-485, RS232, 100Base T /Ethernet (self-contained only)		
Internal Recording:	32 Gbytes		
Environmental:			
Temperature:	-5° to 45° C (Operating), -30°C to 60° C (Storage)		
Depth Rating:	300 m,		
Waves:			
Wave Height:	Hs, 1% of measured value		
Period:	Tp, 1-100 s		
Direction:	Dp, accuracy 2 deg		
Sample Rate:	2 Hz typical, including vertical beam		

Specifications may be subject to change at any time in the future.

** In Development